

G5-RSS

MODULAR BIDIRECTIONAL DC POWER SYSTEMS



POSITIVE PROBLEM SOLVING **+=**

With the ability to source or sink DC power up to high voltage and currents, the G5-RSS is ideal for cycling and emulating energy storage devices. Modules are stackable to 6MW with mains recycling.

Each power dense module has an extensive feature set which includes programmable PI parameters and an inbuilt 8 channel recording scope. Adjustable power/resistance limits are provided. Optional remote control interfaces are available including high-speed CAN and EtherCAT. Every G5-RSS features an autoranging output, which allows for many more V/I combinations at nominal power. Modules can be fitted into flight cases or lab racks, with options including isolation monitoring and emergency stops.

- + Programmable Ripple up to 10kHz**
- + Two Current Ranges for Higher Accuracy**
- + Mixed Power Nominals in Master-Slave**
- + Optional Battery Emulation Software**
- + Sink/Source Voltages up to 3000V**
- + Ultra-Fast Dynamic Behaviour**

CONTENTS


Selection Table/Modularity	2
Options/Form Factor	3
Operating Ranges & Features (9kW-27kW)	4-5
Operating Ranges & Features (36kW-54kW)	6-7
Highlighted Operating Ranges & Features	8
Autoranging/Operating Modes	9
Input	10
Interfaces & Control	11-13
Software/Soft Tools	14
Application Specific GUIs	15-16
Isolation/Mechanical	16
Safety & Protection	17
Common G5-RSS Applications	18

SELECTION TABLE

Part Number	Maximum Power	Q1 Source Voltage	Q4 Sink Voltage	Current Range	Internal Resistance Range
G5-RSS 9-500-54	9kW	0 to 500Vdc	3 to 500Vdc*	0 to ± 54 A	0 to 18519m Ω
G5-RSS 18-500-108	18kW	0 to 500Vdc	3 to 500Vdc*	0 to ± 108 A	0 to 9259m Ω
G5-RSS 18-1000-54	18kW	0 to 1000Vdc	5 to 1000Vdc*	0 to ± 54 A	0 to 37037m Ω
G5-RSS 27-500-162	27kW	0 to 500Vdc	3 to 500Vdc*	0 to ± 162 A	0 to 6173m Ω
G5-RSS 27-1500-54	27kW	0 to 1500Vdc	8 to 1500Vdc*	0 to ± 54 A	0 to 55556m Ω
G5-RSS 36-500-216	36kW	0 to 500Vdc	3 to 500Vdc*	0 to ± 216 A	0 to 4630m Ω
G5-RSS 36-1000-108	36kW	0 to 1000Vdc	5 to 1000Vdc*	0 to ± 108 A	0 to 18519m Ω
G5-RSS 45-500-270	45kW	0 to 500Vdc	3 to 500Vdc*	0 to ± 270 A	0 to 3704m Ω
G5-RSS 54-500-324	54kW	0 to 500Vdc	3 to 500Vdc*	0 to ± 324 A	0 to 3086m Ω
G5-RSS 54-1000-162	54kW	0 to 1000Vdc	5 to 1000Vdc*	0 to ± 162 A	0 to 12346m Ω
G5-RSS 54-1500-108	54kW	0 to 1500Vdc	8 to 1500Vdc*	0 to ± 108 A	0 to 27778m Ω

* The maximum current that can be taken derates as the voltage reduces beneath the lower level. Please see below for more details.


The maximum current that can be taken derates at low voltages. As standard the G5-RSS operates in HV Sink Mode when operating as a DC load. In this mode the user can sink full current from 3% V_{NOM} to 100% V_{NOM} , according to the maximum power. The HV Sink Mode operating range is indicated in dark grey.



Part Number	Point 1: 10% I_{MAX} [HV Mode]	Point 2: 100% I_{MAX} [HV Mode]
G5-RSS 9-500-54	8V / 5.4A	15V / -54A
G5-RSS 18-500-108	8V / 10.8A	15V / -108A
G5-RSS 18-1000-54	15V / 5.4A	30V / 54A
G5-RSS 27-500-162	8V / 16.2A	15V / -162A
G5-RSS 27-1500-54	23V / 5.4A	45V / 54A

Part Number	Point 1: 10% I_{MAX} [HV Mode]	Point 2: 100% I_{MAX} [HV Mode]
G5-RSS 36-500-216	8V / -21.6A	15V / -216A
G5-RSS 36-1000-108	15V / -10.8A	30V / -108A
G5-RSS 45-500-270	8V / -27A	15V / -270A
G5-RSS 54-500-324	8V / -32.4A	15V / -324A
G5-RSS 54-1000-162	15V / -16.2A	30V / -162A
G5-RSS 54-1500-108	23V / -10.8A	45V / -108A

If you require to sink higher currents at lower voltages, then setting a maximum voltage between $\frac{1}{50}$ to $\frac{1}{3}$ of the module's nominal voltage switches the G5-RSS to Low Voltage mode. The values possible at 100% I_{MAX} and 10% I_{MAX} are provided below. Lower voltages are possible with further current derating. The LV Sink Mode operating range is indicated in red.




Part Number	Point 3: 10% I_{MAX} [LV Mode]	Point 4: 100% I_{MAX} [LV Mode]
G5-RSS 9-500-54	2V / 5.4A	3V / -54A
G5-RSS 18-500-108	2V / 10.8A	3V / -108A
G5-RSS 18-1000-54	2V / 5.4A	5V / 54A
G5-RSS 27-500-162	2V / 16.2A	3V / -162A
G5-RSS 27-1500-54	3V / 5.4A	8V / 54A

Part Number	Point 3: 10% I_{MAX} [LV Mode]	Point 4: 100% I_{MAX} [LV Mode]
G5-RSS 36-500-216	2V / -21.6A	3V / -216A
G5-RSS 36-1000-108	2V / -10.8A	5V / -108A
G5-RSS 45-500-270	2V / -27A	3V / -270A
G5-RSS 54-500-324	2V / -32.4A	3V / -324A
G5-RSS 54-1000-162	2V / -16.2A	5V / -162A
G5-RSS 54-1500-108	3V / -10.8A	8V / -108A

MODULARITY (MASTER/SLAVE)

G5-RSS modules can be arranged in series, parallel or matrix array configurations up to 6MW. Each module is able to operate independently, so that systems can be reconfigured, expanded or broken up as needs dictate. Inbuilt system comms allow users to switch between various set-ups. It is possible to connect models with different nominal powers in an asymmetric parallel or series configuration, as long as each module has the same nominal voltage. For example, an 18kW/500V/ ± 108 A and 54kW/500V/ ± 324 A module can be connected together to in parallel to create a 72kW/500V/ ± 432 A system.

The modular approach is useful for test houses and research labs who regularly test different sized power devices. The diagram shows all the possible combinations with four 54kW/1500V modules.

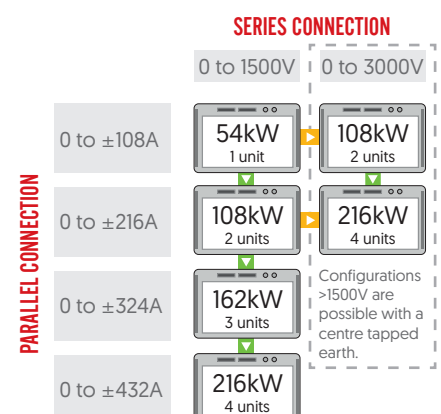

OPTIONS	
CODE	DESCRIPTION
FORM FACTOR AND ENCLOSURES	
/LR	Integration into a 19" lab rack
/FC	Integration into a flightcase
INPUT	
/FILTER	Front panel air filter and frame arrangement providing G3 filtration efficient for $\geq 10\mu\text{m}$ particles
INTERFACES AND CONTROL	
/HMI	Lockable touchscreen HMI providing front panel control and measurement
/CANMP	Multi-protocol CAN interface with up to 100 user configurable messages
/ETHERCAT	EtherCAT interface
/SCPI	SCPI interface via TCP/IP, connection over LAN interface
SOFTWARE/SOFT TOOLS	
/TFE	Integrated function generating engine for time based programming, including sweep function
/AAP	Integrated function generating engine with application area (parametric) programming
/BATSIM	GUI simulating battery characteristics with adjustable parameters
/BATCONTROL	Energy storage and drive cycling GUI
/SASCONTROL	Solar array simulation GUI (includes /AAP option)
SAFETY AND PROTECTION	
/ISR	Integrated Safety Relay, e-stop interface for shutdown to EN ISO 13849-1:2015, Performance Level c
/PACOB	Protection against accidental contact of the AC terminal block
/RPP	Automatic voltage matching with reverse polarity protection
/XCD	AC safety discharge circuit discharging AC lines to <60V in <1s of AC power loss, required to meet EN 62477-1 for AC plug connections

FORM FACTOR AND ENCLOSURES

STANDARD FEATURES

TECHNICAL DATA	
Module Dimensions	19" x 673mm [W x D] without terminals, a full cabinet integration service is available on request
Module Height	4U [9kW/18kW models], 7U [27kW/36kW models], 10U [45kW/54kW models]
Weight	40kg [9kW models], 50kg [18kW models], 77kg [27kW models], 87kg [36kW models], 111kg [45kW models], 121kg [54kW models]
Basic Construction	IP 20 (up to IP 54 when mounted in a cabinet)

Each G5-RSS is built into a 19" rackmounting case as standard. Units can be treated to a laboratory rack or flight case integration. Common options include mains cables, passive indication of any residual DC voltage, isolation monitoring of DC cables and a panel mounted emergency stop. Switch panels with removable DC links can be fitted for modular systems. This simplifies the reconfiguration between series, parallel or independent use. Simple wheeled cabinets are also available.



4U 9kW/18kW MODULES



7U 27kW/36kW MODULES



10U 45kW/54kW MODULES



216kW CABINET INTEGRATION

OPERATING RANGES AND FEATURES (9kW-27kW MODELS)

STANDARD FEATURES

	G5-RSS 9-500-54	G5-RSS 18-500-108	G5-RSS 18-1000-54	G5-RSS 27-500-162	G5-RSS 27-1500-54
Remote Voltage Sense	Programmable [stability/drift: $\leq 0.01\%$ FS ⁴ temperature coefficient: 0.007% FS/ $^{\circ}\text{C}^5$				
Stability/Drift	Voltage: $\leq 0.01\%$ FS ⁴ current: $\leq 0.01\%$ FS ⁴ current low range [-10% to 10% FS]: $\leq 0.01\%$ FS ⁴				
Temperature Coefficient	Voltage: 0.005% FS/ $^{\circ}\text{C}^5$ current: 0.005% FS/ $^{\circ}\text{C}^5$ current low range [<10% FS] 1 kHz Filter: $\leq 0.003\%$ FS/ $^{\circ}\text{C}^5$				
Efficiency	95% at $P_{\text{MAX}}/V_{\text{MAX}}$, 94% at $P_{\text{MAX}}/I_{\text{MAX}}$				
Rise/Fall Time ⁶ : 10% to 90% of Voltage Step [0 to 90% V_{MAX} / 90% P_{MAX}]	$\leq 180\mu\text{s}$	$\leq 170\mu\text{s}$	$\leq 180\mu\text{s}$	$\leq 170\mu\text{s}$	$\leq 170\mu\text{s}$
Rise/Fall Time ⁷ : 10% to 90% of Current Step [-90% to 90% I_{MAX} at 33% V_{MAX}] 10% to 90% of step/settling time	20 μs /190 μs	25 μs /180 μs	25 μs /150 μs	20 μs /190 μs	25 μs /190 μs
Rise/Fall Time ⁷ : 10% to 90% of Current Step [-90% to -10% I_{MAX} at 33% V_{MAX}] 10% to 90% of step/settling time	20 μs /70 μs				
Rise/Fall Time ⁷ : 10% to 90% of Current Step [10% to 90% I_{MAX} at 33% V_{MAX}] 10% to 90% of step/settling time	20 μs /70 μs				
Transient Response Time ⁸ [CV, Recovery Within 0.5% of Set Voltage]	$\leq 160\mu\text{s}$	$\leq 200\mu\text{s}$	$\leq 110\mu\text{s}$	$\leq 200\mu\text{s}$	$\leq 150\mu\text{s}$
Transient Response Time ⁹ [CC, Recovery Within 2% of Set Current]	$\leq 250\mu\text{s}$	$\leq 250\mu\text{s}$	$\leq 300\mu\text{s}$	$\leq 250\mu\text{s}$	$\leq 290\mu\text{s}$
Voltage Drop While Load Switching On [-90% to 90% P_{MAX} at 90% V_{MAX} in HighCap mode]	$\leq 2\%$ FS				
Voltage Drop While Load Switching On [-90% to 90% P_{MAX} at 33% V_{MAX} in HighCap mode]	$\leq 4\%$ FS				
Voltage Drop While Load Switching On [45% to 90% P_{MAX} at 90% V_{MAX} in HighCap mode]	$\leq 0.6\%$ FS	$\leq 0.6\%$ FS	$\leq 0.5\%$ FS	$\leq 0.6\%$ FS	$\leq 0.6\%$ FS
Voltage Overshoot While Load Switching Off [90% to -90% P_{MAX} at 90% V_{MAX} in HighCap Mode]	$\leq 2\%$ FS				
Voltage Overshoot While Load Switching Off [90% to -90% P_{MAX} at 33% V_{MAX} in HighCap Mode]	$\leq 5\%$ FS	$\leq 4\%$ FS	$\leq 4\%$ FS	$\leq 5\%$ FS	$\leq 4\%$ FS
Voltage Overshoot While Load Switching Off [90% to 45% P_{MAX} at 90% V_{MAX} in HighCap Mode]	$\leq 0.5\%$ FS	$\leq 0.7\%$ FS	$\leq 0.5\%$ FS	$\leq 0.7\%$ FS	$\leq 0.5\%$ FS
Output Capacitance: X-capacitor LowCap	12 μF	24 μF	6 μF	36 μF	4 μF
Output Capacitance: X-capacitor HighCap	222 μF	444 μF	111 μF	666 μF	74 μF
Output Capacitance: Y-capacitor at DC	125nF	144nF	144nF	162nF	162nF
Ripple: Output Voltage Ripple [10Hz to 3.8MHz]: Vrms, LowCap, Ohmic Load, 90% P_{MAX} , 90% V_{MAX} , CV Mode	$\leq 0.06\%$ FS	$\leq 0.03\%$ FS	$\leq 0.05\%$ FS	$\leq 0.02\%$ FS	$\leq 0.03\%$ FS
Ripple: Output Voltage Ripple [10Hz to 3.8MHz]: Vrms, HighCap, Ohmic Load, 90% P_{MAX} , 90% V_{MAX} , CV Mode	$\leq 0.02\%$ FS	$\leq 0.01\%$ FS	$\leq 0.02\%$ FS	$\leq 0.01\%$ FS	$\leq 0.02\%$ FS
Ripple: Output Current Ripple [10Hz to 3.8MHz]: Arms, LowCap, Ohmic Load, 90% P_{MAX} , 90% I_{MAX} , CC Mode	$\leq 0.15\%$ FS	$\leq 0.05\%$ FS	$\leq 0.05\%$ FS	$\leq 0.05\%$ FS	$\leq 0.03\%$ FS
Noise: [4.1kHz to 3.8MHz] : Vpp, LowCap, Ohmic Load, 90% P_{MAX} , 90% V_{MAX} , CV Mode	$\leq 0.04\%$ FS	$\leq 0.2\%$ FS	$\leq 0.2\%$ FS	$\leq 0.15\%$ FS	$\leq 0.15\%$ FS
Noise: [4.1kHz to 3.8MHz] : Vpp, HighCap, Ohmic Load, 90% P_{MAX} , 90% V_{MAX} , CV Mode	$\leq 0.1\%$ FS				

¹ At 25 $^{\circ}\text{C}$ ambient temperature, constant line conditions. ² With a constant resistive load in LowCap mode.

³ Constant voltage mode, recovery within 0.5% SetValue at 30% V_{MAX} /100% V_{MAX} with a resistive load in HighCap mode.

⁴ 8h after 1h warm up time in voltage ON state at constant line input, load and temperature. ⁵ At constant line and load conditions.

⁶ Voltage set-value step, constant ohmic load, LowCap mode. ⁷ Current set-value step, constant voltage, LowCap mode.

⁸ 0 to 90% P_{MAX} load step at 90% V_{MAX} . Assuming an ohmic load in HighCap mode.

⁹ 45 to 90% P_{MAX} load step at 90% I_{MAX} . Assuming an ohmic load in LowCap mode.

OPERATING RANGES AND FEATURES (9kW-27kW MODELS)

STANDARD FEATURES

	G5-RSS 9-500-54	G5-RSS 18-500-108	G5-RSS 18-1000-54	G5-RSS 27-500-162	G5-RSS 27-1500-54
HMI Touchpanel Meter Resolution	0.01V/0.01A	0.01V/0.01A	0.1V/0.01A	0.01V/0.01A	0.1V/0.01A
Output Discharge to <60V	Active discharge enabled: <1s Active discharge disabled: <60s [500V models] <75s [1000V models] <90s [1500V models]				
Static Accuracy ¹⁰ : Power at I _{MAX} 1kHz Filter	0.03% FS				
Static Accuracy ¹⁰ : Voltage	0.01% FS	0.01% FS	0.01% FS	0.01% FS	0.016% FS
Static Accuracy ¹⁰ : Voltage Sense	0.01% FS	0.01% FS	0.01% FS	0.01% FS	0.016% FS
Static Accuracy ¹⁰ : Current Full Range 1kHz Filter at 30% V _{MAX}	0.03% FS				
Static Accuracy ¹⁰ : Current Low Range (<10% FS) 1kHz Filter 90% V _{MAX}	0.003% FS				
Static Accuracy ¹⁰ : Resistance at I _{MAX} 1kHz Filter	0.025% FS	0.03% FS	0.025% FS	0.03% FS	0.03% FS
Pulsating Load ¹¹ : LowCap Mode	≤0.7kHz: 176Vrms [500V units] 352Vrms [1000V units] 528Vrms [1500V units] 0.8kHz: 159Vrms [500V units] 318Vrms [1000V units] 477Vrms [1500V units] 0.9kHz: 141Vrms [500V units] 282Vrms [1000V units] 423Vrms [1500V units] 1kHz: 123Vrms [500V units] 246Vrms [1000V units] 369Vrms [1500V units] 2kHz: 53Vrms [500V units] 106Vrms [1000V units] 159Vrms [1500V units] 3kHz: 35Vrms [500V units] 70Vrms [1000V units] 105Vrms [1500V units] 4kHz: 26Vrms [500V units] 52Vrms [1000V units] 78Vrms [1500V units] 6kHz: 20Vrms [500V units] 40Vrms [1000V units] 60Vrms [1500V units] 8kHz: 17Vrms [500V units] 34Vrms [1000V units] 51Vrms [1500V units] 10kHz: 14Vrms [500V units] 28Vrms [1000V units] 42Vrms [1500V units]				
Pulsating Load ¹¹ : HighCap Mode	≤80Hz: 176Vrms [500V units] 352Vrms [1000V units] 528Vrms [1500V units] 100Hz: 141Vrms [500V units] 282Vrms [1000V units] 423Vrms [1500V units] 150Hz: 88Vrms [500V units] 176Vrms [1000V units] 264Vrms [1500V units] 200Hz: 67Vrms [500V units] 134Vrms [1000V units] 201Vrms [1500V units] 250Hz: 53Vrms [500V units] 106Vrms [1000V units] 159Vrms [1500V units] 300Hz: 40Vrms [500V units] 80Vrms [1000V units] 120Vrms [1500V units] 400Hz: 30Vrms [500V units] 60Vrms [1000V units] 90Vrms [1500V units] 500Hz: 26Vrms [500V units] 52Vrms [1000V units] 78Vrms [1500V units] 1kHz: 11Vrms [500V units] 22Vrms [1000V units] 33Vrms [1500V units] 2kHz: 4Vrms [500V units] 8Vrms [1000V units] 12Vrms [1500V units]				
Max. Ripple DC+ to PE / DC- to PE [Max. Allowed Ripple Vrms ≤1kHz: 1050 Vrms >1 kHz: [(1.26×10 ⁶)/f +5] Vrms]	≤1kHz: 1050Vrms 2kHz: 630Vrms 5kHz: 250Vrms 10kHz: 130Vrms 20kHz: 65Vrms 50kHz: 30Vrms 80kHz: 20Vrms				
Small Signal Modulation [Voltage Controller LowCap Mode]	Frequency (CV, CC): 0 to 10kHz Modulation range Vrms sine at pulsating load data Attenuation: dependent on load Phase lag analogue input to voltage out: 130μs				
Small Signal Modulation [Current Controller LowCap Mode]	Modulation range Arms sine at 10kHz: 0 to 5% FS Attenuation: dependent on load Phase lag analogue input to current out: 110μs				
Sense Input Impedance While Operational	632kΩ	632kΩ	1212kΩ	632kΩ	1812kΩ
Sense Input Impedance - Voltage OFF	632kΩ	632kΩ	1212kΩ	632kΩ	1812kΩ
Sense Input Impedance - Voltage OFF [Output Measurement Disconnected]	Open				
Ballast Resistor DC Power Port at Voltage OFF [no /RPP Option or RPP Closed]	70kΩ	37kΩ	140kΩ	25kΩ	210kΩ

¹⁰ At 25° ambient temperature, constant line/load conditions, after 1h warm up time in voltage on state, normal distribution [k=2].

¹¹ Max. load ripple, current sine, max. amplitude

OPERATING RANGES AND FEATURES (36kW-54kW MODELS)

STANDARD FEATURES

	G5-RSS 36-500-216	G5-RSS 36-1000-108	G5-RSS 45-500-270	G5-RSS 54-500-324	G5-RSS 54-1000-162	G5-RSS 54-1500-108
Remote Voltage Sense	Programmable [stability/drift: $\leq 0.01\%$ FS ⁴ temperature coefficient: 0.007% FS/ $^{\circ}\text{C}$ ⁵					
Stability/Drift	Voltage: $\leq 0.01\%$ FS ⁴ current: $\leq 0.01\%$ FS ⁴ current low range [-10% to 10% FS]: $\leq 0.01\%$ FS ⁴					
Temperature Coefficient	Voltage: 0.005% FS/ $^{\circ}\text{C}$ ⁵ current: 0.005% FS/ $^{\circ}\text{C}$ ⁵ current low range [<10% FS] 1 kHz Filter: $\leq 0.003\%$ FS/K ⁵					
Efficiency	95% at $P_{\text{MAX}}/V_{\text{MAX}}$ 94% at $P_{\text{MAX}}/I_{\text{MAX}}$					
Rise/Fall Time ⁶ : 10% to 90% of Voltage Step [0 to 90% V_{MAX} / 90% P_{MAX}]	$\leq 150\mu\text{s}$	$\leq 180\mu\text{s}$	$\leq 150\mu\text{s}$	$\leq 170\mu\text{s}$	$\leq 170\mu\text{s}$	$\leq 170\mu\text{s}$
Rise/Fall Time ⁷ : 10% to 90% of Current Step [-90% to 90% I_{MAX} at 33% V_{MAX}] 10% to 90% of step/settling time	25 μs /190 μs	25 μs /180 μs	20 μs /190 μs	20 μs /120 μs	20 μs /190 μs	25 μs /190 μs
Rise/Fall Time ⁷ : 10% to 90% of Current Step [-90% to -10% I_{MAX} at 33% V_{MAX}] 10% to 90% of step/settling time	20 μs /70 μs					
Rise/Fall Time ⁷ : 10% to 90% of Current Step [10% to 90% I_{MAX} at 33% V_{MAX}] 10% to 90% of step/settling time	20 μs /70 μs					
Transient Response Time ⁸ [CV, Recovery Within 0.5% of Set Voltage]	$\leq 100\mu\text{s}$	$\leq 100\mu\text{s}$	$\leq 200\mu\text{s}$	$\leq 200\mu\text{s}$	$\leq 200\mu\text{s}$	$\leq 120\mu\text{s}$
Transient Response Time ⁹ [CC, Recovery Within 2% of Set Current]	$\leq 240\mu\text{s}$	$\leq 300\mu\text{s}$	$\leq 250\mu\text{s}$	$\leq 250\mu\text{s}$	$\leq 250\mu\text{s}$	$\leq 290\mu\text{s}$
Voltage Drop While Load Switching On [-90% to 90% P_{MAX} at 90% V_{MAX} in HighCap mode]	$\leq 2\%$ FS					
Voltage Drop While Load Switching On [-90% to 90% P_{MAX} at 33% V_{MAX} in HighCap mode]	$\leq 4\%$ FS					
Voltage Drop While Load Switching On [45% to 90% P_{MAX} at 90% V_{MAX} in HighCap mode]	$\leq 0.5\%$ FS	$\leq 0.6\%$ FS	$\leq 0.7\%$ FS	$\leq 0.7\%$ FS	$\leq 0.7\%$ FS	$\leq 0.7\%$ FS
Voltage Overshoot While Load Switching Off [90% to -90% P_{MAX} at 90% V_{MAX} in HighCap Mode]	$\leq 1.5\%$ FS	$\leq 2\%$ FS	$\leq 2\%$ FS	$\leq 2\%$ FS	$\leq 2\%$ FS	$\leq 2\%$ FS
Voltage Overshoot While Load Switching Off [90% to -90% P_{MAX} at 33% V_{MAX} in HighCap Mode]	$\leq 4\%$ FS	$\leq 4\%$ FS	$\leq 5\%$ FS	$\leq 5\%$ FS	$\leq 5\%$ FS	$\leq 5\%$ FS
Voltage Overshoot While Load Switching Off [90% to 45% P_{MAX} at 90% V_{MAX} in HighCap Mode]	$\leq 0.5\%$ FS	$\leq 0.5\%$ FS	$\leq 1\%$ FS	$\leq 1\%$ FS	$\leq 0.7\%$ FS	$\leq 0.7\%$ FS
Output Capacitance: X-capacitor LowCap	48 μF	12 μF	60 μF	72 μF	18 μF	8 μF
Output Capacitance: X-capacitor HighCap	888 μF	222 μF	1010 μF	1332 μF	333 μF	148 μF
Output Capacitance: Y-capacitor at DC	181nF	181nF	200nF	219nF	219nF	219nF
Ripple: Output Voltage Ripple [10Hz to 3.8MHz]: Vrms, LowCap, Ohmic Load, 90% P_{MAX} 90% V_{MAX} CV Mode	$\leq 0.03\%$ FS	$\leq 0.03\%$ FS	$\leq 0.02\%$ FS	$\leq 0.02\%$ FS	$\leq 0.03\%$ FS	$\leq 0.03\%$ FS
Ripple: Output Voltage Ripple [10Hz to 3.8MHz]: Vrms, HighCap, Ohmic Load, 90% P_{MAX} 90% V_{MAX} CV Mode	$\leq 0.02\%$ FS	$\leq 0.02\%$ FS	$\leq 0.02\%$ FS	$\leq 0.02\%$ FS	$\leq 0.02\%$ FS	$\leq 0.02\%$ FS
Ripple: Output Current Ripple [10Hz to 3.8MHz]: Arms, LowCap, Ohmic Load, 90% P_{MAX} 90% I_{MAX} CC Mode	$\leq 0.05\%$ FS	$\leq 0.05\%$ FS	$\leq 0.05\%$ FS	$\leq 0.05\%$ FS	$\leq 0.05\%$ FS	$\leq 0.05\%$ FS
Noise: [4.1kHz to 3.8MHz] : Vpp, LowCap, Ohmic Load, 90% P_{MAX} 90% V_{MAX} CV Mode	$\leq 0.15\%$ FS	$\leq 0.15\%$ FS	$\leq 0.15\%$ FS	$\leq 0.15\%$ FS	$\leq 0.15\%$ FS	$\leq 0.15\%$ FS
Noise: [4.1kHz to 3.8MHz] : Vpp, HighCap, Ohmic Load, 90% P_{MAX} 90% V_{MAX} CV Mode	$\leq 0.1\%$ FS					

¹ At 25°C ambient temperature, constant line conditions. ² With a constant resistive load in LowCap mode.

³ Constant voltage mode, recovery within 0.5% SetValue at 30% V_{MAX} /100% V_{MAX} with a resistive load in HighCap mode.

⁴ 8h after 1h warm up time in voltage ON state at constant line input, load and temperature. ⁵ At constant line and load conditions.

⁶ Voltage set-value step, constant ohmic load, LowCap mode. ⁷ Current set-value step, constant voltage, LowCap mode.

⁸ 0 to 90% P_{MAX} load step at 90% V_{MAX} . Assuming an ohmic load in HighCap mode.

⁹ 45 to 90% P_{MAX} load step at 90% I_{MAX} . Assuming an ohmic load in LowCap mode.

OPERATING RANGES AND FEATURES (36kW-54kW MODELS)

STANDARD FEATURES

	G5-RSS 36-500-216	G5-RSS 36-1000-108	G5-RSS 45-500-270	G5-RSS 54-500-324	G5-RSS 54-1000-162	G5-RSS 54-1500-108
HMI Touchpanel Meter Resolution	0.01V/0.01A	0.1V/0.01A	0.01V/0.01A	0.01V/0.01A	0.1V/0.01A	0.1V/0.01A
Output Discharge to <60V	Active discharge enabled: <1s Active discharge disabled: <60s (500V models) <75s (1000V models) <90s (1500V models)					
Static Accuracy ¹⁰ : Power at I_{MAX} 1kHz Filter	0.03% FS					
Static Accuracy ¹⁰ : Voltage	0.01% FS	0.01% FS	0.01% FS	0.01% FS	0.01% FS	0.016% FS
Static Accuracy ¹⁰ : Voltage Sense	0.01% FS	0.01% FS	0.01% FS	0.01% FS	0.01% FS	0.016% FS
Static Accuracy ¹⁰ : Current Full Range 1kHz Filter at 30% V_{MAX}	0.03% FS					
Static Accuracy ¹⁰ : Current Low Range (<10% FS) 1kHz Filter 90% V_{MAX}	0.003% FS					
Static Accuracy ¹⁰ : Resistance at I_{MAX} 1kHz Filter	0.03% FS					
Pulsating Load ¹¹ : LowCap Mode	≤0.7kHz: 176Vrms (500V units) 352Vrms (1000V units) 528Vrms (1500V units) 0.8kHz: 159Vrms (500V units) 318Vrms (1000V units) 477Vrms (1500V units) 0.9kHz: 141Vrms (500V units) 282Vrms (1000V units) 423Vrms (1500V units) 1kHz: 123Vrms (500V units) 246Vrms (1000V units) 369Vrms (1500V units) 2kHz: 53Vrms (500V units) 106Vrms (1000V units) 159Vrms (1500V units) 3kHz: 35Vrms (500V units) 70Vrms (1000V units) 105Vrms (1500V units) 4kHz: 26Vrms (500V units) 52Vrms (1000V units) 78Vrms (1500V units) 6kHz: 20Vrms (500V units) 40Vrms (1000V units) 60Vrms (1500V units) 8kHz: 17Vrms (500V units) 34Vrms (1000V units) 51Vrms (1500V units) 10kHz: 14Vrms (500V units) 28Vrms (1000V units) 42Vrms (1500V units)					
Pulsating Load ¹¹ : HighCap Mode	≤80Hz: 176Vrms (500V units) 352Vrms (1000V units) 528Vrms (1500V units) 100Hz: 141Vrms (500V units) 282Vrms (1000V units) 423Vrms (1500V units) 150Hz: 88Vrms (500V units) 176Vrms (1000V units) 264Vrms (1500V units) 200Hz: 67Vrms (500V units) 134Vrms (1000V units) 201Vrms (1500V units) 250Hz: 53Vrms (500V units) 106Vrms (1000V units) 159Vrms (1500V units) 300Hz: 40Vrms (500V units) 80Vrms (1000V units) 120Vrms (1500V units) 400Hz: 30Vrms (500V units) 60Vrms (1000V units) 90Vrms (1500V units) 500Hz: 26Vrms (500V units) 52Vrms (1000V units) 78Vrms (1500V units) 1kHz: 11Vrms (500V units) 22Vrms (1000V units) 33Vrms (1500V units) 2kHz: 4Vrms (500V units) 8Vrms (1000V units) 12Vrms (1500V units)					
Max. Ripple DC+ to PE / DC- to PE (Max. Allowed Ripple Vrms ≤1kHz: 1050 Vrms >1 kHz: $[(1.26 \times 10^6)/f + 5]$ Vrms)	≤1kHz: 1050Vrms 2kHz: 630Vrms 5kHz: 250Vrms 10kHz: 130Vrms 20kHz: 65Vrms 50kHz: 30Vrms 80kHz: 20Vrms					
Small Signal Modulation (Voltage Controller LowCap Mode)	Frequency (CV, CC): 0 to 10kHz Modulation range Vrms sine: see pulsating load data Attenuation: dependent on load Phase lag analogue input to voltage out: 130μs					
Small Signal Modulation (Current Controller LowCap Mode)	Modulation range Arms sine at 10kHz: 0 to 5% FS Attenuation: dependent on load Phase lag analogue input to current out: 110μs					
Sense Input Impedance While Operational	632kΩ	1212kΩ	632kΩ	632kΩ	1212kΩ	1812kΩ
Sense Input Impedance - Voltage OFF	632kΩ	1212kΩ	632kΩ	632kΩ	1212kΩ	1812kΩ
Sense Input Impedance - Voltage OFF (Output Measurement Disconnected)	Open					
Ballast Resistor DC Power Port at Voltage OFF (no /RPP Option or RPP Closed)	19kΩ	74kΩ	13kΩ	13kΩ	51kΩ	112kΩ

¹⁰ At 25° ambient temperature, constant line/load conditions, after 1h warm up time in voltage on state, normal distribution [k=2].

¹¹ Max. allowed ripple Vrms sine

OPERATING RANGES AND FEATURES

HIGHLIGHTED FEATURES




SENSE COMPENSATION

Sense plus terminals are built into the G5-RSS for the connection of sense wire which compensates for voltage drops in the load lines. This has a number of advantages over traditional sense. It is permitted to interrupt the load line during operation [voltage on]. The maximum voltage drop compensation is adjustable. The voltage difference between G5-RSS output and sensing point is monitored. If a set limit is exceeded, the G5-RSS unit shuts off. This is particularly useful for applications with long cables often prone to unwanted voltage drops.



FAST DYNAMICS AND HIGH STABILITY

A current step between 90% sourcing to 90% sinking current can be as quick as 50µs, enabling high speed drives to be supplied. Advanced users have access to the controller settings enabling the response to be optimised for particular loads. This example shows a current step through quadrants. The upper trace shows the current transition is achieved in 50µs with a small overshoot before settling. The lower plot shows a more regulated response within 200µs. Voltage typically takes 100µs to recover within 0.5% of the set value. In multi-module systems the communication time between modules need to be considered.

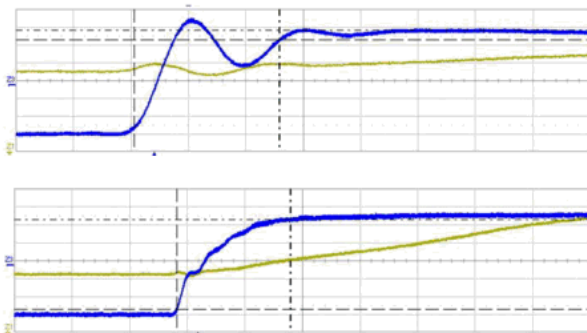

SECOND CURRENT RANGE

Each module features a second current range that can be built into systems to give better accuracy and resolution for low current applications. This is particularly useful when testing high voltage equipment, such as electric vehicle battery packs, which typically produce low currents.




SWITCHABLE OUTPUT CAPACITANCE

Switchable capacitance is provided within each G5-RSS module as standard and is used to optimise the DC filter depending on the application in which the systems are used. A low capacitance level provides fast dynamics in constant current when charging/ discharging/ cycling energy storage devices. Switching to the higher cap value provides for smoother operation during hard load steps when operating in constant voltage. Typical applications include energy storage simulation for electric drive developments.



PROGRAMMABLE RIPPLE

By utilising the optional embedded function generator the user can set a current ripple at up to 10kHz. The magnitude can be up to 5% of the nominal system current. Depending on the impedance of the DUT the resulting voltage ripple can be calculated. The below example shows a 10kHz ripple generated using the function generator of the G5-RSS. A peak to peak current of 8A has been superimposed on a current of 100A. Alternatively, a ripple can be implemented from an external waveform generator via the analogue interface using a proportional 0-10V signal.

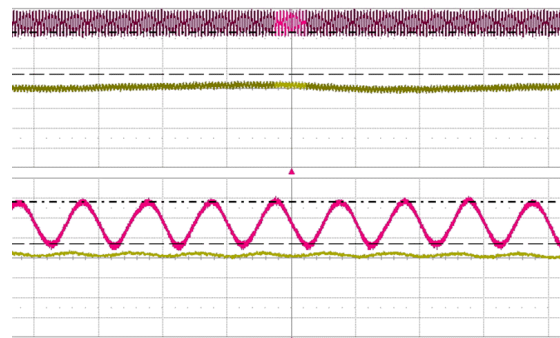


AUTORANGING CAPABILITY


Every G5-RSS features an autoranging output. This allows many more voltage/current combinations at nominal power than a traditional bidirectional DC power system. An example of the difference is shown below using a G5-RSS 54-500-324.

Using one autoranging bidirectional PSU instead of several traditional power systems saves both cost and bench space. Despite the units offering such a large output range, they are still incredibly power dense. 54kW of output power is provided from 10U of rackmounting height.

TRADITIONAL 54kW/500V SYSTEM

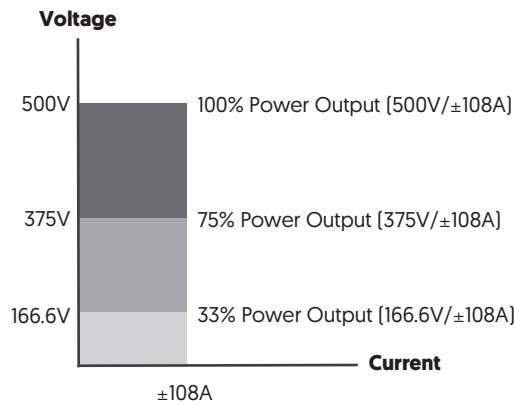

G5-RSS 54kW/500V SYSTEM

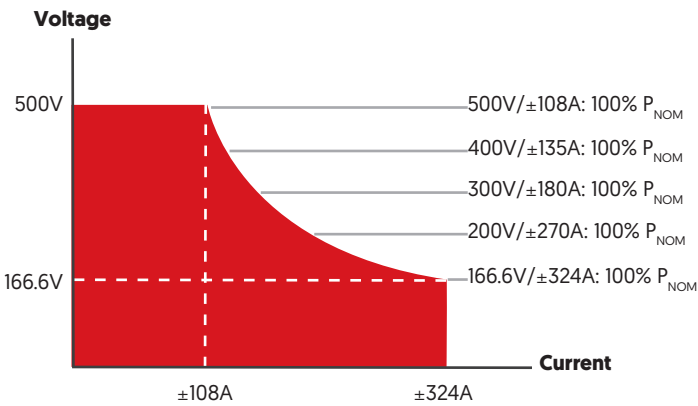

OPERATING MODES

STANDARD FEATURES

	G5-RSS 9-500-54	G5-RSS 18-500-108	G5-RSS 18-1000-54	G5-RSS 27-500-162	G5-RSS 27-1500-54
Operating Modes	Constant Voltage [0 to 100% of V _{MAX}] Constant Current [0 to ±100% of I _{MAX}] Constant Power [+5% to +100% of P _{MAX} / -5% to -100% of P _{MAX}]				
Internal Resistance Range	0 to 18519mΩ	0 to 9259mΩ	0 to 37037mΩ	0 to 6173mΩ	0 to 55556mΩ
Programmable Load [CR Mode: R _{MAX} at V _{MAX} , R _{MIN} at V _{MIN}]	0.19 to 3333Ω	0.09 to 1667Ω	0.37 to 6667Ω	0.06 to 1111Ω	0.56 to 10000Ω
Standard Interfaces	Analogue, Ethernet (up to 800 × 16 bit/s) & USB (up to 450 × 16 bit/s)				

	G5-RSS 36-500-216	G5-RSS 36-1000-108	G5-RSS 45-500-270	G5-RSS 54-500-324	G5-RSS 54-1000-162	G5-RSS 54-1500-108
Operating Modes	Constant Voltage [0 to 100% of V _{MAX}] Constant Current [0 to ±100% of I _{MAX}] Constant Power [+5% to +100% of P _{MAX} / -5% to -100% of P _{MAX}]					
Internal Resistance Range	0 to 4630mΩ	0 to 18519mΩ	0 to 3704mΩ	0 to 3086mΩ	0 to 12346mΩ	0 to 27778mΩ
Programmable Load [CR Mode: R _{MAX} at V _{MAX} , R _{MIN} at V _{MIN}]	0.05 to 833Ω	0.19 to 3333Ω	0.04 to 667Ω	0.03 to 556Ω	0.12 to 2222Ω	0.28 to 5000Ω
Standard Interfaces	Analogue, Ethernet (up to 800 × 16 bit/s) & USB (up to 450 × 16 bit/s)					

HIGHLIGHTED FEATURE

1mΩ

3200mΩ

INTERNAL RESISTANCE RANGE

Each module is built with a user programmable internal resistance range as standard. This makes the power supplies ideal for simulating the output of energy storage devices such as battery packs, fuel cell stacks and super capacitors. The exact range varies by module.

STANDARD FEATURES

TECHNICAL DATA	
AC Line Voltage	3 × 380VAC to 480VAC ±10%
Line Frequency	50Hz/60Hz
Mains Connection Type	3L + PE [no neutral]
Rated I _{NOM} at 3 × 380VAC	15ARMS [9kW units] 29ARMS [18kW units] 44ARMS [27kW units] 58ARMS [36kW units] 73ARMS [45kW units] 87ARMS [54kW units]
Rated I _{NOM} at 3 × 400VAC	14ARMS [9kW units] 28ARMS [18kW units] 42ARMS [27kW units] 55ARMS [36kW units] 69ARMS [45kW units] 83ARMS [54kW units]
Rated I _{NOM} at 3 × 415VAC	14ARMS [9kW units] 27ARMS [18kW units] 40ARMS [27kW units] 53ARMS [36kW units] 67ARMS [45kW units] 80ARMS [54kW units]
Rated I _{NOM} at 3 × 440VAC	13ARMS [9kW units] 25ARMS [18kW units] 38ARMS [27kW units] 50ARMS [36kW units] 63ARMS [45kW units] 75ARMS [54kW units]
Rated I _{NOM} at 3 × 460VAC	12ARMS [9kW units] 24ARMS [18kW units] 36ARMS [27kW units] 48ARMS [36kW units] 61ARMS [45kW units] 72ARMS [54kW units]
Rated I _{NOM} at 3 × 480VAC	12ARMS [9kW units] 23ARMS [18kW units] 35ARMS [27kW units] 46ARMS [36kW units] 58ARMS [45kW units] 69ARMS [54kW units]
Inrush Current	<33ARMS [9kW-18kW units] <66ARMS [27kW-36kW units] <99ARMS [45kW-54kW units]
Power Factor	0.99 at P _{MAX}
THDi	≤0.03 at 90%P _{MAX}
Standby Power	27W [9kW units] 31W [18kW units] 51W [27kW units] 52W [36kW units] 71W [45kW-54kW units]
Touch Current Unweighted [Output ON/OFF]	≤1.7mA / 2.6mA typical [9kW units] ≤1.8mA / 3.4mA typical [18kW units] ≤0.9mA / 3.7mA typical [27kW units] ≤0.9mA / 3.7mA typical [36kW units] ≤1mA / 4.6mA typical [45kW units] ≤1mA / 4.6mA typical [54kW units]
Touch Current Weighted [Output ON/OFF]	≤0.7mA / 2.5mA typical [9kW units] ≤0.8mA / 3.2mA typical [18kW units] ≤0.8mA / 3.6mA typical [27kW units] ≤0.8mA / 3.6mA typical [36kW units] ≤0.9mA / 4.4mA typical [45kW units] ≤0.9mA / 4.4mA typical [54kW units]
Input Filter Discharge to 60V	L-PE / L-L: <20s, with option /XCD: <1s

HIGHLIGHTED FEATURE



ACTIVE POWER FACTOR CORRECTION

G5-RSS modules have Active Power Factor Correction (PFC) circuit integrated into the input stage as standard. This enhances the overall efficiency of the modules across the output power range when compared to a unit that does not have active PFC. In practice, this means a significant lower peak current value, a decrease of RMS value of the phase current and less perturbations of other equipment running on the same grid.

OPTIONS

CODE	DESCRIPTION
/FILTER	Front panel air filter and frame arrangement providing G3 filtration efficient for ≥10um particles

HIGHLIGHTED OPTION



INPUT AIR FILTER (/FILTER)


The G5-RSS modules are designed to be operated within a clean laboratory environment. If there is the possibly that the environment will be less clean, then the optional front panel frame and air filter arrangement offer some additional protection. The standard filter material is rated in class G3. This class is effective at trapping a high proportion [90%] of particles ≥10um according to EN 779.

Air filters have proven beneficial in environments where there is the risk of some metal working potentially leading to swarf contamination. Please note that the units with or without air filters must not be operated in environments where fine conductive dust is present.



INTERFACES AND CONTROL

STANDARD INTERFACES

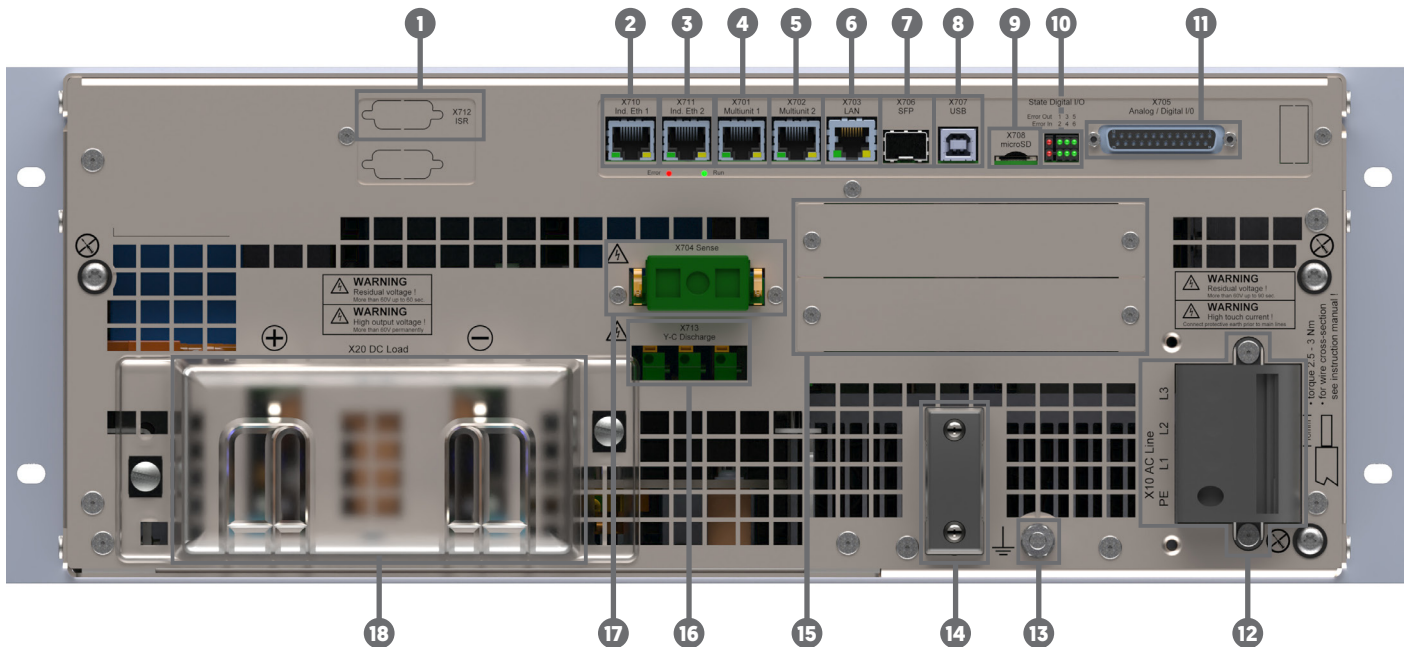


TECHNICAL DATA

1	Optional	X712	Slot reserved for optional integrated safety relay (/ISR) interface.
2	Optional	X710	Industrial Ethernet, e.g. EtherCAT. This interface can be easily retrofitted in the field once released.
3	Optional	X711	Industrial Ethernet, e.g. EtherCAT. This interface can be easily retrofitted in the field once released.
4	Standard	X701	Multi-device communication interface SORTe protocol for parallel, series and matrix connection of modules.
5	Standard	X702	Multi-device communication interface SORTe protocol for parallel, series and matrix connection of modules.
6	Standard	X703	LAN interface (for external remote control).
7	Future Release	X706	Small form-factor pluggable (SFP) port which features a fibre optic card. Speeds up to 48kHz are planned via a direct connection to the G5-RSS's controller. The SFP will also allow a planned integration with Aurora protocol to support real-time controllers such as Typhoon and OPAL-RT. This additional functionality will be easily enabled in the field once released.
8	Standard	X707	USB interface (for external remote control).
9	Future Release	X708	Unassigned micro SD slot, with the potential of module datalogging planned in the future. Release date yet to be confirmed.
10	Standard	State Digital I/O	Status indication of digital I/O status on X705.
11	Standard	X705	Proportional 0-10VDC isolated analogue interface [detailed overleaf].
12	Standard	X10	AC line side connection (L1, L2, L3, PE). Illustration shows optional AC protective cover (/PACOB).
13	Standard	-	Earthing terminal on unit chassis for additional earth connection.
14	Optional	-	Strain relief for AC cable
15	Optional	-	Spare slots for optional interface cards (e.g. CANmp high speed 1kHz digital interface).
16	Standard	X713	Y-Cap discharge interface.
17	Standard	X704	Sense interface.
18	Standard	X20	DC terminals for connection to DUT with standard protective cover.

STANDARD ANALOGUE INTERFACE

An analogue interface is provided as standard which operates at 48kHz. The control port is configured as a Sub-D 25 female connector and is located on the rear panel. It allows output values to be set and read proportionally using a 0-10VDC analogue signal. Digital inputs and outputs enable various functions such as the interlock and output ON/OFF. A 10VDC reference is provided for analogue control. Digital functions are switched via a high/low signal. A 24VDC supply voltage is provided for these functions.

INPUT/OUTPUT DATA	
Number of Inputs/Outputs	4
Internal Resolution	16 bit
Input Accuracy	Bipolar range: $\pm 0.1\%$, Unipolar range: $\pm 0.2\%$
Output Accuracy	$\pm 0.2\%$
Input Filter	2nd order low pass filter, cut off frequency: 15kHz
Temperature Coefficient	0.02% FS/ $^{\circ}$ C
Sampling/Update Rate	48kS/s
Output Settling Time	10 μ s [typical]
Input Voltage Range	-10V to +10V, -5V to +5V, 0V to 5V, 0V to 10V [selectable]
Absolute Max Input Voltage	± 30 VDC
Input Impedance	1M Ω [typical]
Output Voltage Range	-10V to +10V, -5V to +5V, 0V to 5V, 0V to 10V [selectable]
Max Output Current	20mA [short circuit proof]
Output Impedance	0.5 Ω [typical]
Delay [Typical]	89 μ s [input to power out], 42 μ s [power out to analogue out]

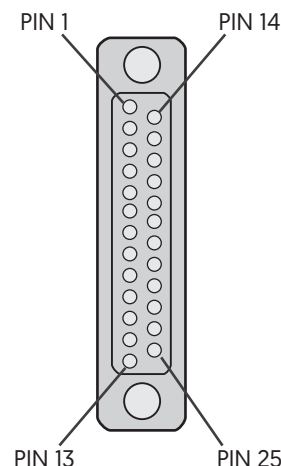

PIN	SIGNAL	I/O	DESCRIPTION
1	AGND	Supp	Analogue ground for pins 2–4, 14–16
2	AIN1	AI	Voltage setpoint input 0–10VDC
3	AIN2	AI	Current setpoint input 0–10VDC
4	AOUT1	AO	Current feedback output 0–10VDC
5	AOUT2	AO	Power feedback output 0–10VDC
6	AOUT3	AO	Analogue reference voltage (+10VDC)
7	DGND	Supp	[Connected to pin 17] 0VDC Dign; common ground for pins 8–9, 18–20, 24, 25
8	APP_DIGIO_4	DI/O	Digital input/ouput ³ 0-2VDC /10-28VDC Default function: Clear error
9	APP_DIGIN_6	DI	Digital input ³ 0-2VDC /10-28VDC Default function: Voltage ON
10	REL1_14	RO	Relay output 1 normally open
11	REL1_13	RO	Relay output 1 common
12	REL2_14	RO	Relay output 2 normally open
13	REL2_13	RO	Relay output 2 common

PIN	SIGNAL	I/O	DESCRIPTION
14	AIN3	AI	Power limit analogue input 0–10VDC
15	AIN4	AI	Load resistance reference value input 0–10 VDC
16	AOUT4	AO	Voltage feedback output 0–10VDC
17	DGND	Supp	[connected to pin 7] Common ground to pins 8–9, 18–20, 24, 25
18	APP_DIGIO_1	DI/O	Digital input/ouput ³ 0-2VDC/10–28VDC
19	APP_DIGIO_2	DI/O	Digital input/ouput ³ 0-2VDC/10–28VDC
20	APP_DIGIO_3	DI/O	Digital input/ouput ³ 0-2VDC/10–28VDC No default function
21	REL3_14	RO	Relay output 3 normally open [warning]
22	REL3_12	RO	Relay output 3 normally closed [warning]
23	REL3_11	RO	Relay output 3 common [warning]
24	APP_DIGIO_5	DI/O	Digital input/ouput ³ 0-2VDC/10–28VDC No default function
25	+24 VDC	Supp	+24VDC I/O Aux power output 24VDC, max. 650mA

¹ Pin 5 [0 VDC] is used as the reference earth for pin 25 [24 VDC] and is connected internally to the equipotential bonding via a 1 k Ω resistor to earth.

² Maximum switching current: 1 A; maximum switching voltage: 24 V. ³ On request digital pins can be programmed for a specific application.

DIGITAL I/O	
Number of Digital Inputs/Outputs	6 [each can be used as input or output]
Output Voltage Supplied for Digital I/O	24VDC [-15%/+20%]
Digital Input Characteristic	IEC61131-2 Type 1
Digital Input Filter	3.2ms [10 μ s, 1ms and 10ms factory configurable]
Digital Output Switching Time	T _{ON} : 64-120 μ s, T _{OFF} : 90-170 μ s
Update Rate Digital Outputs	1ks/s


DIGITAL I/O	
Max Voltage Digital Inputs	30VDC
Sampling Rate Digital Inputs	1ks/s
Digital Output Type	High-side switch
Load Type	Ohmic, inductive, lamp load
Max Total Output Current [All Channels]	0.65A
Max Output Current Per Channel	0.625A [short circuit proof]

RELAY OUTPUTS	
Number of Relay Outputs	2 × SPST (NO), 1 × SPDT
Load Type	Ohmic, inductive, lamp load
Max Switching Voltage	30VDC
Max Switching Current	SPST: 3A, SPDT: 1A
Switching Time	Typically 20ms

HIGHLIGHTED FEATURE

FRONT PANEL INDICATION

As standard the front panel has backlit indicators which illuminate to show which control mode the power system is operating in (CV, CC, CP, CR). When the G5-RSS has been successfully energised, the corresponding power light illuminates green to indicate this. An illumination is also provided to visually warn users of any status (yellow) or error (red) message.

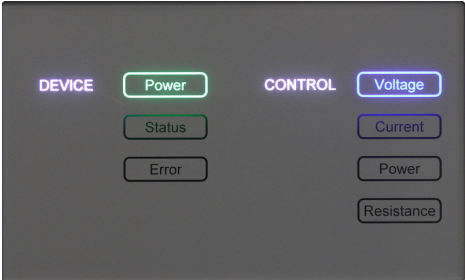

OPTIONAL INTERFACES

CODE	DESCRIPTION
/HMI	Lockable touchscreen HMI providing front panel control and measurement
/CANMP	Multi-protocol CAN interface with up to 100 user configurable messages
/ETHERCAT	EtherCAT interface
/SCPI	SCPI interface via TCP/IP, connection over LAN interface

HIGHLIGHTED OPTIONS

TOUCHSCREEN HMI (/HMI)

The optional HMI provides a simple and intuitive way of control and measurement via a touchscreen panel. Users can directly access features such as the system's protections, warnings/errors and optional function generator without the use of a computer. A user defined passcode can be set to lock the touch screen, which prevents unauthorised access. When selected, the HMI replaces the front panel indicator.



CAN MULTI-PURPOSE INTERFACE (/CANMP)

CANmp is a high speed digital interface operating at 1kHz. The interface gives users the capability to customise the CAN protocol. Up to 100 messages are user configurable. Along with the CAN ID the data length code, byte order, start bit, data type and signal factor can be adjusted by the user. A DBC file is provided and messages can be easily configured within the standard windows software. Messages can be sent cyclically or upon receipt of a sync or syncID signal.

SOFTWARE/SOFT TOOLS


STANDARD G5.CONTROL GUI

All G5-RSS units come with a simple and intuitive G5.Control operating GUI as standard. Live values of the power system are displayed graphically along with any warning and error messages. The software provides a variety of second level parameters, ideal for users who like to optimise their test processes. In standard user mode the operator can remotely program set values, enable voltage output as well as the ability to analyse different variables including set and actual values via the integrated scope.

The scope function can simultaneously record up to 8 system variables. Recording can be started manually or by a defined trigger event from any variable of the system. All actual and set values [currents/voltages/power/internal resistance] can be recorded. Other recordable items include system temperatures, intermediate DC circuit, low voltage auxiliary power supplies, error related values and variables from the controller section.

A password protected section is available to the advanced user and service technician. In addition to the standard functions the authorised user is able to:

- + Program linear ramp functions at start up and set value steps during operation
- + Configure multi-unit operation
- + Program the PI controller parameters
- + Program the unit's limit values
- + Calibrate and adjust values as necessary
- + Update the firmware

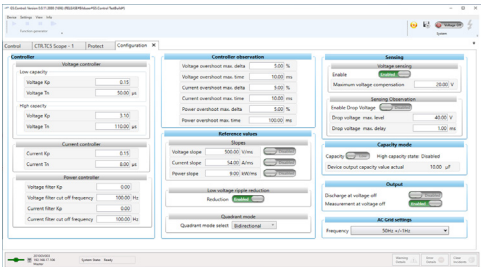

OPTIONAL SOFTWARE

CODE	DESCRIPTION
/TFE	Integrated function generating engine for time based programming, including sweep function
/AAP	Integrated function generating engine with application area (parametric) programming
/BATSIM	GUI simulating battery characteristics with adjustable parameters
/BATCONTROL	Energy storage and drive cycling GUI
/SASCONTROL	Solar array simulation GUI (includes AAP option)

HIGHLIGHTED OPTIONS

FUNCTION GENERATOR (/TFE & /AAP)

Complex DC waveforms can be implemented through an optional embedded function generator. The highly programmable nature of the function generator allows users to plot out exact waveforms. This is often advantageous when emulating a power device with a very specific behaviour profile. For example, when quality testing fuel cell powered equipment, the specific behaviour of a discharging fuel cell can be programmed and replicated.

As well as custom shapes, standard square, sawtooth and sine waveforms can be plotted against time. Voltage/current and voltage/power relationships can also be programmed where necessary. Parametric programming is possible when selecting option /AAP, where instead of the time axis, an input variable (V_{IN} , I_{IN} or P_{IN}) can be selected.



HIGHLIGHTED OPTIONS


BATTERY SIMULATION (/BATSIM)

BatSim is a battery emulation GUI for use with G5-RSS power systems. The GUI allows the power supplies to simulate real world behaviour of a battery pack.

Emulating a battery pack allows specific sections of a circuit to be isolated and researched. Nearly all relevant electrical characteristics are programmable including number of cells, energy capacity, cut off limits, chemistry type and nominal voltage. The modularity of the power systems provides a convenient method to emulate different size battery stacks. Hard to replicate conditions, such as a cranking curve from a cold start can be programmed and repeated when used in conjunction with the function generator.

The multi-channel data logger provides live reporting and output to file [CSV] with timestamps. Previously recorded data can be imported, reviewed and compared in the analyser mode. Other features include:


- + Adjustable internal resistance and discharge current
- + Variation of exponential capacity and voltage levels
- + Emulation of common battery chemistries
- + Novel chemistries available on request
- + Series/parallel configuration of cells

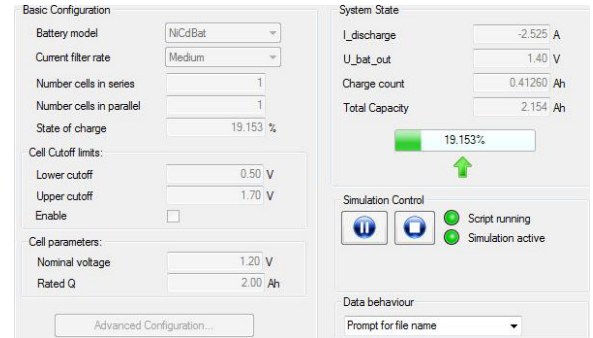

SOLAR ARRAY SIMULATION (/SASCONTROL)

SASControl software has all EN 50530 tests pre-installed, with minor adaptations possible for particular inverter models. The GUI allows users to edit irradiance, temperature, amplitude values or input scaling with special commands.

Previous tests have been conducted using over 400,000 individual data points, with more possible. This allows users to simulate changing conditions over the course of day.

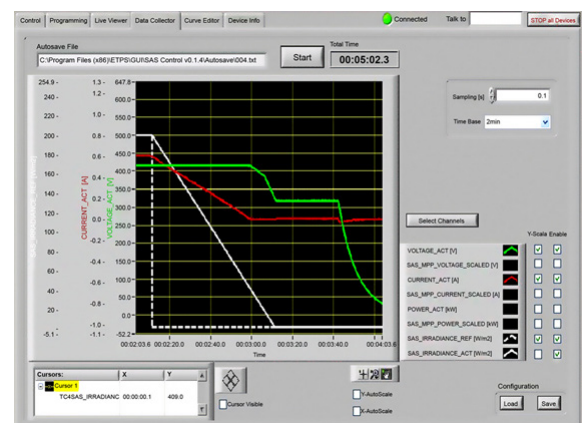

APPLICATION SPECIFIC GUIs


HIGHLIGHTED OPTIONS

ELECTRIC DRIVE AND BATTERY CYCLING (/BATCONTROL)

Drive cycle tests can be implemented using BatControl. The GUI's main screen provides an overview of the main test values for all BatControl operations. Live data from the connected power system is displayed, and setting/adjustment of primary values is possible.

Previous data obtained from a test track can be imported and recreated, allowing the G5-RSS to simulate a real world driving test inside a lab environment. Battery and capacitor charge/discharge profiles can also be implemented through the GUI. An internal charge counter allows users to view live data for Wh and Ah. Energy storage orientated tests which users can program include:

- + Battery charge/discharge cycles
- + Automated drive cycle loading and simulation
- + Fuel cell loading
- + Comparative studies
- + Shot and burst overload tests
- + System degradation tests
- + Battery lifetime tests

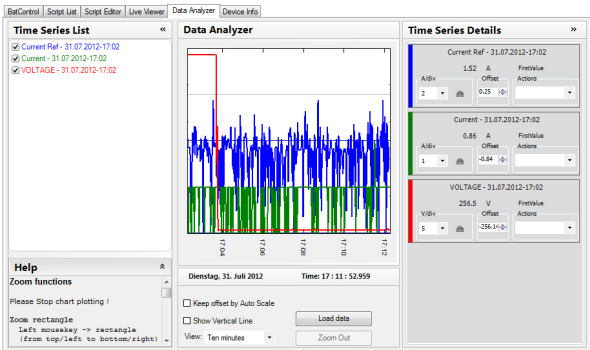

ISOLATION

STANDARD FEATURES

TECHNICAL DATA	
DC+/DC- Output to PE	1500VDC
Input Isolation Test Voltage [AC Terminals to PE]	3100VDC [2s]
Output Isolation Test Voltage [DC Terminals to PE]	2500VDC [2s]
Working Voltage AC Terminals to PE	900VDC
Working Voltage AC to DC Terminals	1500VDC
Resistance [DC+/DC- output to PE]	X713 jumper inserted: 22MΩ, X713 jumper removed: open

MECHANICAL

STANDARD FEATURES

TECHNICAL DATA	
AC Terminals	Screw terminals for 6 to 25 mm² [9kW-18kW models]/ 6 to 35 mm² [27-54kW models] wires, diameter ≤8.5mm
DC Terminals	Output bars for M8 bolts
Cooling	Direct forced air, front to back
Operating Altitude	≤2000m above sea level [slight temperature derating possible above 1000m]
Operation Temperature	-5°C to +50°C with no air filter / -5°C to +40°C when optional air filter is installed [9kW-36kW models] -5°C to +40°C with no air filter / -5°C to +30°C when optional air filter is installed [45kW-54kW models]
Storage Temperature	-25°C to +70°C
Relative Humidity	≤85% [non condensing]
Vibration	IEC 60068-2-6 [Test Fc]
Acoustic Noise Level [1m From Front of Unit]	≤54dB [90% P _{MAX} /90% I _{MAX} at +25°C ambient]

STANDARD FEATURES

TECHNICAL DATA	
Over Voltage Protection	Programmable
Over Current Protection	Programmable
Over Power Protection	Programmable
Over Temperature Protection	Standard
Protection Class	1 [EN 62477-1]
Degree of Pollution	2 [EN 60664-1]
Overvoltage Category	Mains input (L-L/L-PE), EN 60664-1/EN 62477-1: II/III, other interfaces: II
Safety of Machinery	EN ISO 13849-1:2015 N/A (without option /ISR), PL c (with 2 channel /ISR), PL e (with 2 channel /ISR and external safety relay)
Low Voltage Directive 2014/35/EU	EN 62477-1:2012 + A11:2014 + A1:2017 + A12:2021
Electrical Equipment (Safety) Regulations 2016	BS EN 62477-1:2012+ A11:2014 + A1:2017 + A12:2021
Directive 2014/30/EU EMC emission [industrial]	EN 61000-6-4:2007 A1:2011 / EN61000-6-4:2019 EN 61000-6-2:2005 / EN 61000-6-2:2019
Electromagnetic Compatibility Regulations 2016 EMC emission [industrial]	BS EN 61000-6-4:2007 A1:2011 /BS EN61000-6-4:2019 BS EN 61000-6-2:2005 / BS EN 61000-6-2:2019
Directive 2014/30/EU EMC industrial level A	EN 61326-1:2013
Electromagnetic Compatibility Regulations 2016 EMC industrial level A	BS EN 61326-1:2013
RoHS Directive	EN IEC 63000:2018
The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012	BS EN IEC 63000:2018
EMV-ILA 01-03b	Emission 9 to 150 kHz test stand area

OPTIONS

CODE	DESCRIPTION
/ISR	Integrated Safety Relay, e-stop interface for shutdown to EN ISO 13849-1:2015, Performance Level c
/PACOB	Protection against accidental contact of the AC terminal block
/RPP	Automatic voltage matching with reverse polarity protection
/XCD	AC safety discharge circuit discharging AC lines to <60V in <1s of AC power loss, required to meet EN 62477-1 for AC plug connections

HIGHLIGHTED OPTIONS

**AUTOMATIC VOLTAGE MATCHING WITH RPP (/RPP)**

When researching energy storage devices, Reverse Polarity Protection [RPP] is recommended for devices without an automatic voltage matching circuit. With the G5-RSS energised but output off, the RPP senses the voltage of the connected energy storage device. A contactor is closed after matching the voltage, to prevent large inrush currents and arcing on start up. The sense lines of the G5-RSS are used to measure the battery voltage. A switched sense is also provided ensuring there is quiescent current draw at voltage off state.

**PROTECTION AGAINST CONTACT (/PACOB)**


A specially produced cover is optionally available which provides protection against accidental contact of AC terminal block (rated to IP20). A cover for the DC output bars is provided as standard.

**INTEGRATED SAFETY RELAY (/ISR)**

For additional safety, a mechanical interlock is available for the mains input of the G5-RSS. The integrated safety relay provides shutdown safety according to EN 13849-1 category 2/3. The ISR is connected to the external safety switch loop. If the external loop is opened, the DC-output of the power system is powered down immediately.


CRANKING CURVE TESTING

Electrical components within a vehicle's subsystem must be able to withstand a wide range of input voltage surges and drops during a start-up. The G5-RSS can accurately recreate these conditions within a lab environment. This increases reproducibility and accuracy of results when compared to using real batteries. Hard to replicate conditions such as voltage cranking during a cold start can be achieved. Voltage/current and voltage/power relationships can be programmed against time where necessary.

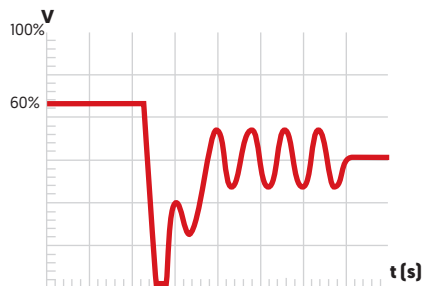


AC RIPPLE ON BATTERY LINK

A potential side effect of charger circuits that contain both AC and DC components is electrical noise. The ripple causes unwanted fluctuations in battery temperature, which results in deterioration of the battery's performance. By utilising the G5-RSS's optional embedded function generator the user can set a current ripple at up to 10kHz to simulate this phenomenon.

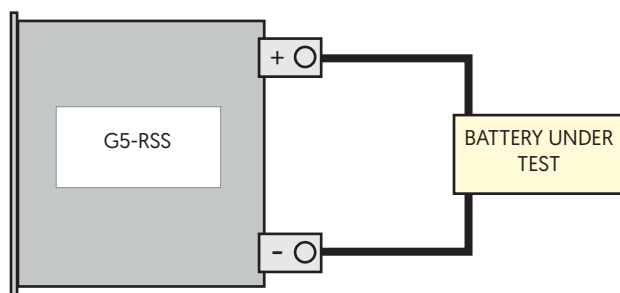


INVERTER/CONVERTER TESTING

The DC input of virtually any power conversion device can be replicated. The influence that variables, such as line voltage variation, have on performance can be isolated and tested. This allows optimum operating conditions to be characterised to improve efficiency and performance.

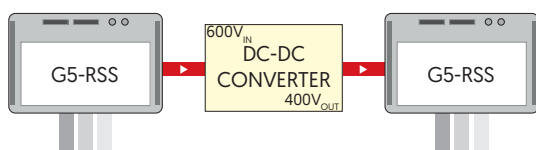


PULSED BATTERY CHARGING

Pulse charging interrupts the traditional DC charging curve with short relaxation periods. The technique is thought to improve battery discharge capacity and help facilitate longer cycle life. Some studies have shown that pulse charging is also helpful in eliminating concentration polarisation. The G5-RSS's embedded function generator allows the PSU to deliver short burst of highly concentrated energy at user defined time intervals. The technique can also be used for powering lasers, electromagnets and plasma generation.

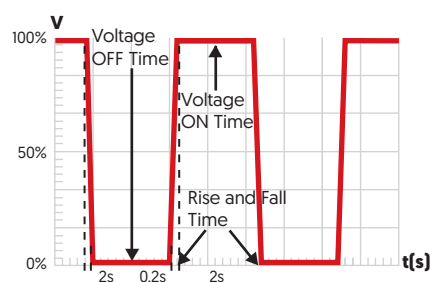

VOLTAGE DROPS & INTERRUPTS

In electronic systems sudden voltage interruptions may cause unexpected behaviour. Supply line disturbances may have several causes, including an additional switch on of large capacitive loads parallel to the supply line or a short circuit caused by loads sharing the supply. The G5-RSS can generate many complex DC waveforms to test devices under realistic conditions to identify any potential issues.

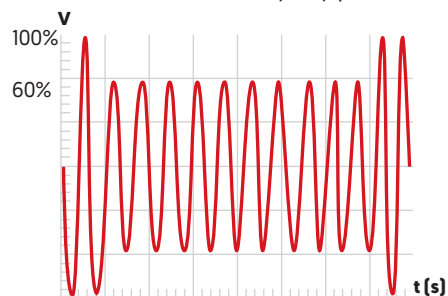

FUEL CELL EMULATION

The discharge behaviour of an FCEV's fuel cell is often irregular. By using the function generator, both conservative and aggressive driver profiles can be replicated. This allows the G5-RSS to perform effective quality testing of fuel cell powered components under all likely operating conditions.



Every effort is made to ensure that the information provided within this technical summary is accurate. However, ETPS Ltd must reserve the right to make changes to the published specifications without prior notice. Where certain operating parameters are critical for your application we advise that they be confirmed at the time of order. ETPS Ltd specialises in modifying its proven platforms to suit your needs. Please contact our office if your requirement is non-standard. Please note that your actual unit may differ from those shown.



“
**WE ARE
POSITIVE
PEOPLE**
”

ETPS engineer electronic power supply and testing systems. Our problem solving skills provide the spark of innovation to some of the world's leading technology brands.



Tel: +44 (0) 1246 452909
Sales: 0800 612 95 75
sales@etps.co.uk
www.etps.co.uk

ETPS Ltd
Unit 14, The Bridge
Beresford Way, Chesterfield
S41 9FG



POSITIVE PROBLEM SOLVING